


Wörner

Stopping and positioning modules for automation technology

Product overview

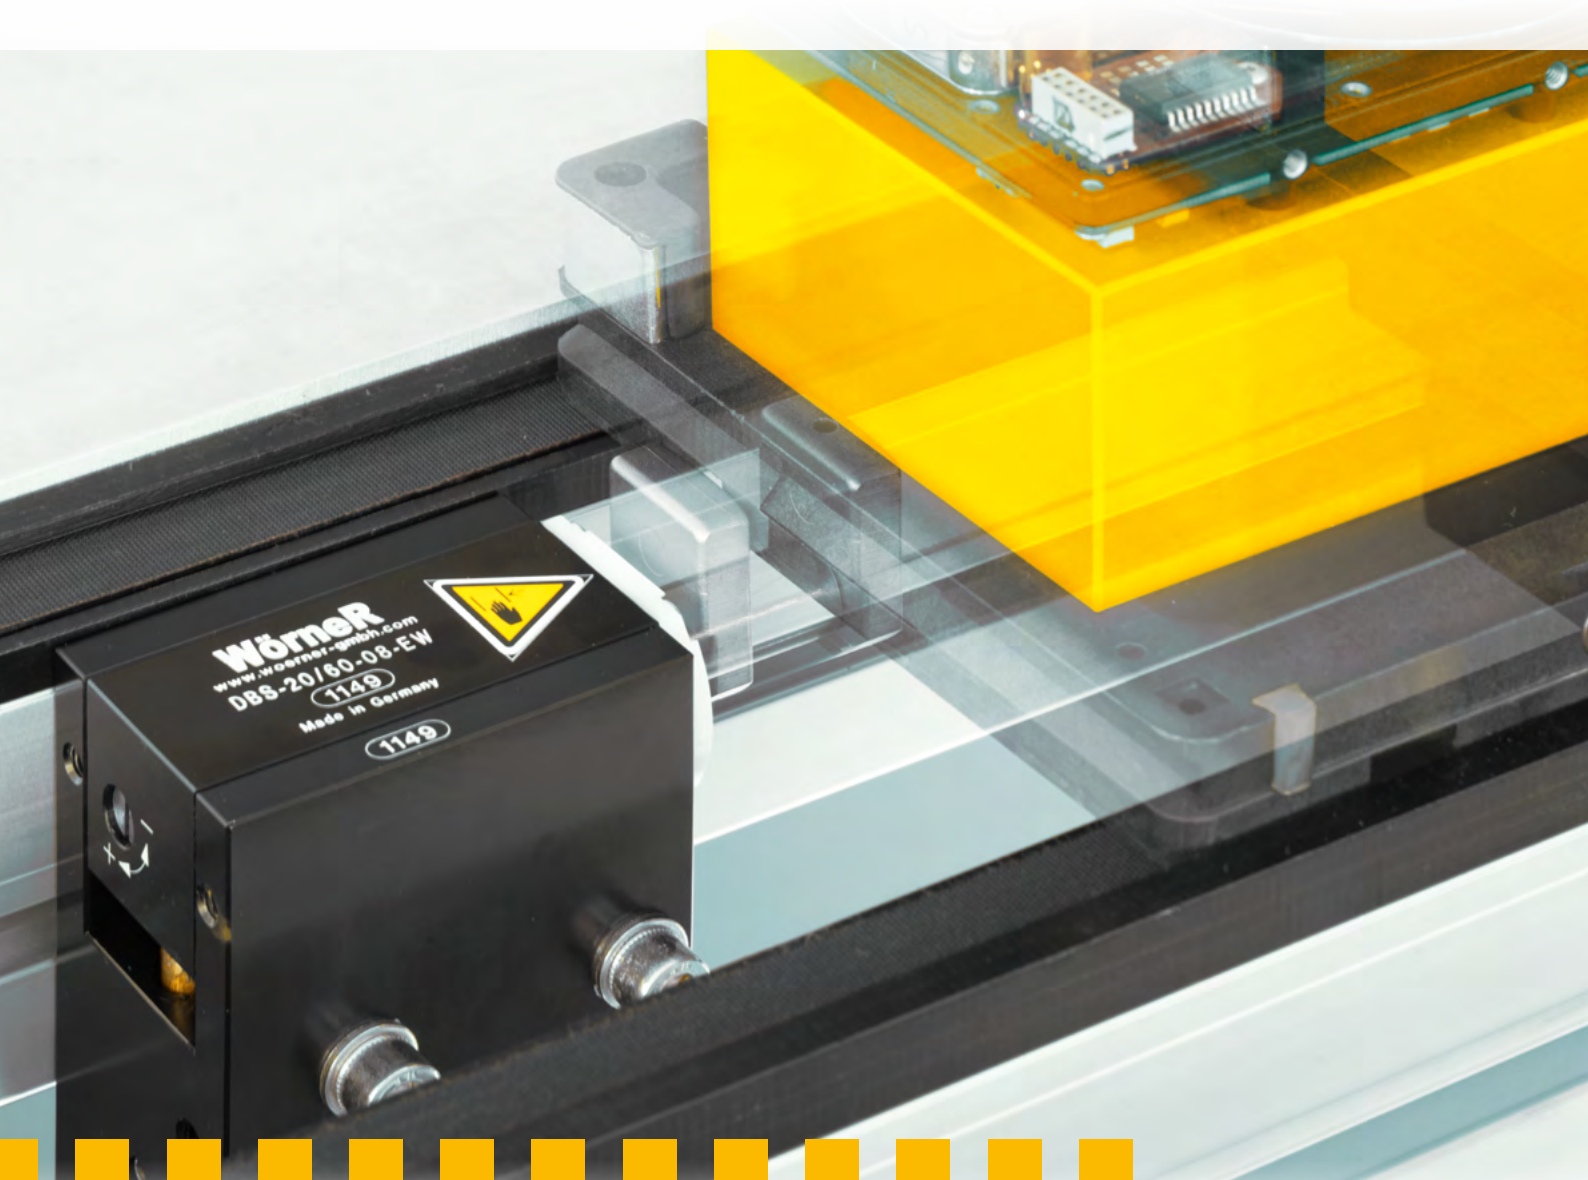

Der Wörner-Stopper. Das Original.

A decent stop strategy for a leading position



ELD-1200: Electrical stopper with damping

Advanced design – featuring outstanding damping and lowering capacities

Outstanding performance through a strong commitment to innovation

With trend-setting innovations, Wörner sets new standards in the automation technology. A highly innovative spirit, technology ex-

pertise and a smart, forward-looking innovation strategy have always been the cornerstones of Wörner's corporate culture. Our design engineers are continuously working to further improve today's solution.

Wörner's focus is on combining innovative ideas, efficiency and manufacturing quality in order to strengthen the market position of our customers. Today and in the future.

Convincing examples of our innovative power are electrically driven stoppers. These have a number of advantages:

- far more energy efficient (plus 70 %) than their pneumatic counterparts
- low operating costs
- reduced power consumption
- minimal installation expenses (plug-and-play)
- various accessories (e.g. integrated sensors)
- easy control of material flow

Wörner patents to prove innovative power, engineered by our committed crew of experts


ELU-30: Small electrical stopper with solenoid

Economic model with extremely low power consumption



ELD-190: Electrical stopper with favoured air damping system

New method to re-extend damping system for more reliability and safety



DEL-650: Heavy-duty electrical stopper with damping

Optimized model with improved damping and lowering kinematics



Damping, stopping, positioning: The right solution for every requirement



From a simple workshop ...

The success story of our stoppers is based on the brilliant idea of the creative mind Helmut Wörner. The technology was patented in Germany 1990, from there the triumph takes its course: Within Europe and soon also internationally.

Today, Wörner stoppers are well-known around the globe. They are in fact a synonym for precision, durability and a safe investment.

The first industrial stopper, the Wörner Delta „SDEH-5000“ (1986)



... to an international specialist for leading-edge stoppers

Wörner's product portfolio covers more than 2.500 components: stoppers, angle dampers, index cylinders and anti-bounce stops are successfully applied in all conventional assembly and conveyor systems in a large variety of industrial sectors.

Experience grown over decades, excellent industry know-how and a modern, highly specialized machine park guarantee that even unusual customer demands can be satisfied.



New, custom solutions through close collaboration

We welcome the chance to put our skills to the test with special tasks: The Wörner expert team generates solutions for any requirement – either from the existing product range of standard products or by designing a tailor-made solution in close cooperation with the customer.



Uncompromising quality and performance


Wörner products “Made in Germany” ...

Wörner has always been committed to an effective quality management system.

The entire Wörner staff is dedicated to achieve our most important goals: providing top performance for the highest quality of all products and services, achieving greatest customer satisfaction and ensuring competitiveness.




Component coordinate-measuring

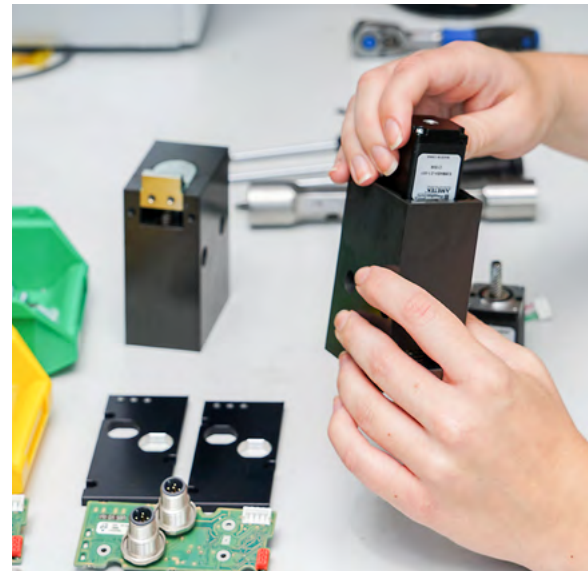

Electrical stopper assembly

... successfully applied all over the world

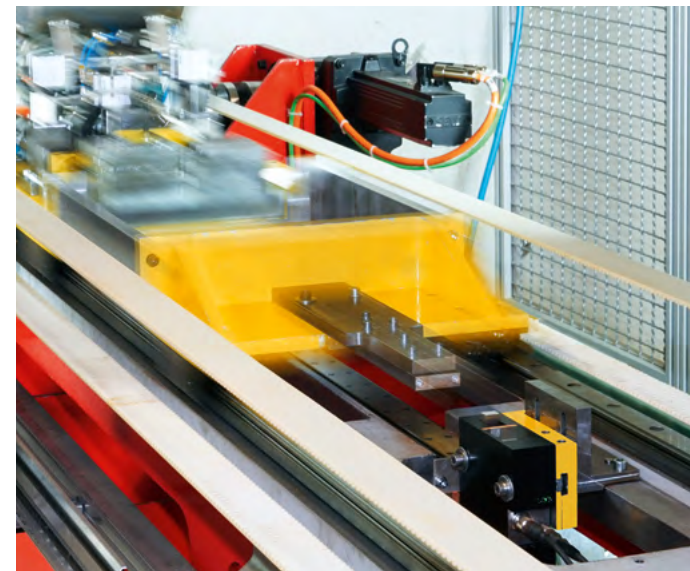

Endurance testing

Wörner's quality and environmental management systems are successfully certified in accordance to the international standards DIN ISO 9001 and ISO 14001. When developing new products, they have to pass extensive endurance




Packaging and shipping

tests. After assembly, every single unit goes through a final inspection.

Before any component leaves the factory, it is carefully packed. Through the international distribution network, Wörner products and services are available world wide.

Wörner components for automated assembly, handling and manufacturing

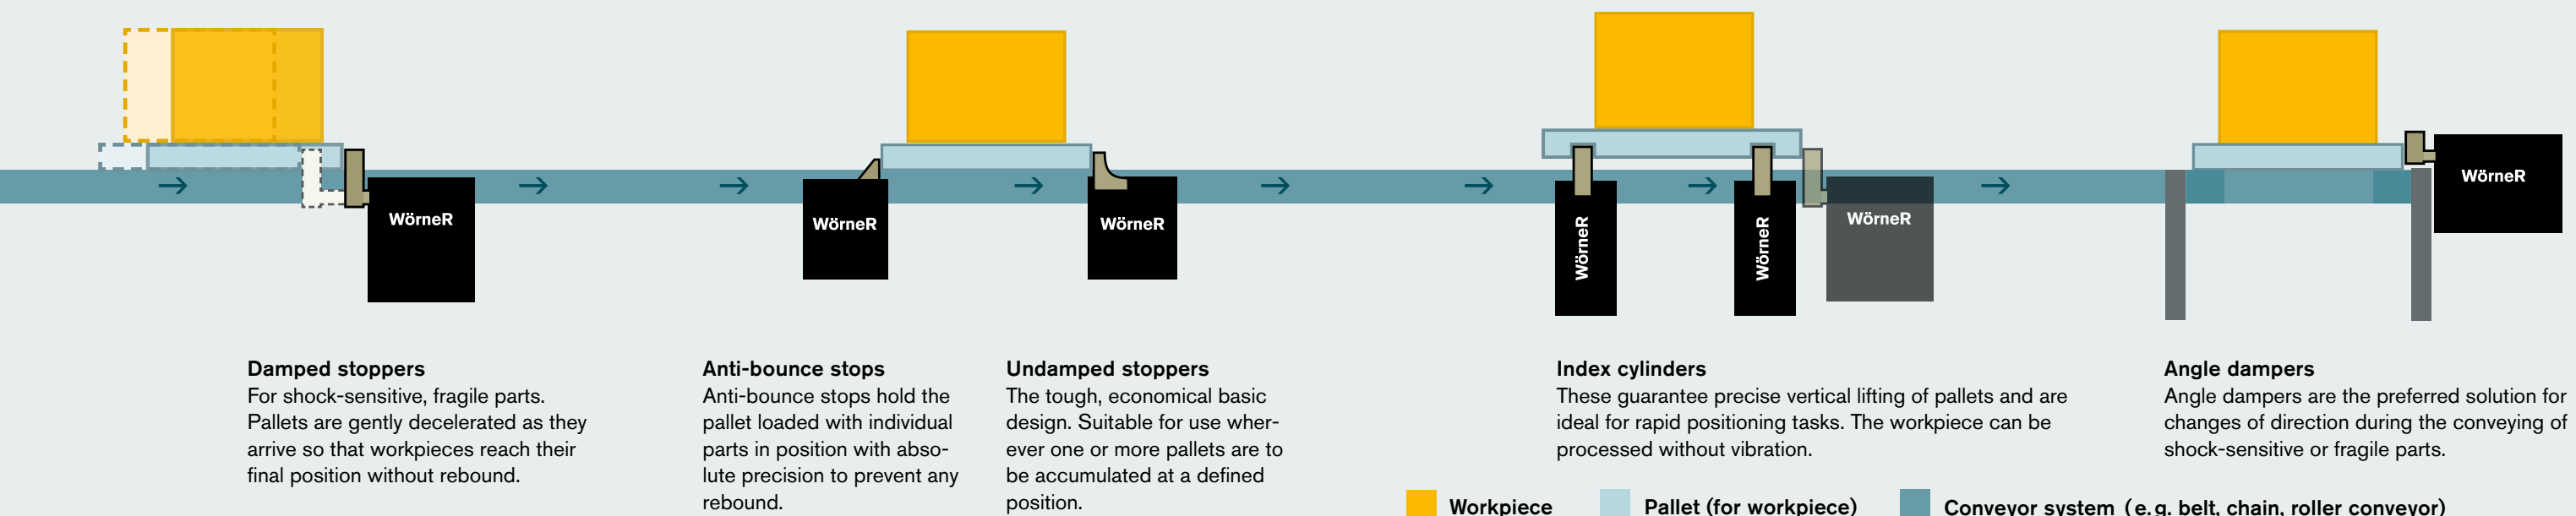

Product overview



The easy way to find the right product:

First of all, choose the **product family** and **product group**.

Then look for the corresponding **basic product** in the relevant table.

You can find the right **product variant** for your system using the data sheet associated with each basic product.

Please also refer to the technical explanations on pages 28/29.

The name of the product variant also serves as its order code (see notes on page 30).

If you need help identifying the variant you need, just get in touch with our service hotline:

Phone: +49 711 601 609 0
E-mail: sales@woerner-gmbh.com

A Wörner core competence: Custom solutions based on customer requirements

In addition to our proven standard products, we offer a variety of custom-built special solutions. You will find examples of these on the following pages under “**Custom-built ...**”.

Just contact us if your project involves special requirements and requires a specific solution!

Product family

Product group

Stoppers

Stopping and clearing

Pneumatic undamped stoppers	D0	10
Pneumatic damped stoppers	DBS	12
Electric undamped stoppers	DEL0 / ELU	17
Electric damped stoppers	DEL / ELD	18
Pneumatic damped stoppers for roller systems	DBSR	20

Angle dampers

Stopping with change of direction

Pneumatic angle dampers	DBSQ	22
-------------------------	------	----

Index cylinders

Raising and positioning

Pneumatic index cylinders	DI	24
---------------------------	----	----

Anti-bounce stops






Preventing rebound

Pneumatic anti-bounce stops	DR	25
-----------------------------	----	----

Accessories

Adapting products and extending their functionality

Pneumatic undamped stoppers

	Basic product		Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants	Image	Basic product		Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants
						at	Weight								at	Weight	
	D0-70		7 mm	n/a	48 N	06 m/min 09 12 18 24 30 36	70 kg 50 25 12 7 4 3	EW/DW H/K I/E cust.-spec. solutions var. access.		D0-350		9 mm	n/a	240 N	06 m/min 09 12 18 24 30 36	350 kg 270 210 180 90 50 35	EW/DW kcust.-spec. solutions var. access.
	D0-120		9 mm	n/a	82 N	06 m/min 09 12 18 24 30 36	120 kg 100 100 100 50 30 20	EW/DW H/K I/E cust.-spec. solutions var. access.		D0-400		9 mm 15 mm 25 mm 40 mm	n/a	275 N	06 m/min 09 12 18 24 30 36	400 kg 300 250 200 110 65 50	EW/DW H/K E G/V cust.-spec. solutions var. access.
	D0-140		8 mm	n/a	96 N	06 m/min 09 12 18 24 30 36	140 kg 120 100 100 50 30 25	EW/DW H/K I cust.-spec. solutions var. access.		D0-400 R		9 mm	n/a	275 N	06 m/min 09 12 18 24 30 36	400 kg 300 250 200 110 65 50	EW/DW rustproof cust.-spec. solutions var. access.
	D0-300		50 mm	n/a	206 N	06 m/min 09 12 18 24 30 36	300 kg 225 125 60 35 20 15	DW H/K cust.-spec. solutions var. access.		D0-800		10 mm 20 mm	n/a	549 N	06 m/min 09 12 18 24 30 36	800 kg 800 800 800 450 250 250	EW/DW H/K I/E G cust.-spec. solutions var. access.

Note: The scope of application for undamped stoppers is highly dependent on the conditions of use, in particular on the coefficient of friction between the conveyor equipment and pallet and on the rigidity of the conveyor. We can provide you with detailed technical advice when making your choice - just ask us!

- EW single-acting

DW double-acting

H heat-resistant

K cold-resistant
- I prepared for inductive position sensor

E prepared for electronic position sensor
- G stop plate with thread

V extended stop plate
- * All specifications given for a coefficient of friction of $\mu = 0.07$

Custom-built:

30200

Undamped separating stop for separating long, thin workpieces and/or pallets. Synchronous lowering possible via a connecting shaft.



Pneumatic damped stoppers

	<u>Basic product</u>	Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		<u>Variants</u>		<u>Basic product</u>	Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		<u>Variants</u>
					at	Weight							at	Weight	
	DBS-18 	7 mm	10 mm	15 N	06 m/min 09 12 18 24 30 36	1 - 22 kg 1 - 20 1 - 13 1 - 7 1 - 4 1 - 3 1 - 2	EW/DW H/K E KU cust.-spec. solutions var. access.		DBS-150-T4 	11,5 mm	20 mm	103 N	06 m/min 09 12 18 24 30 36	5-150 kg 5-100 5-100 5- 90 5- 55 5- 35 5- 25	EW/DW H/K cust.-spec. solutions var. access.
	DBS-20/60 	8 mm 13 mm	21,5 mm	41 N	06 m/min 09 12 18 24 30 36	3.5-60 kg 3.5-40 3.5-35 3.5-30 3.5-24 3.5-18 3.5-10	EW/DW H/K E KI/KU/KA/V S cust.-spec. var. access.		DBS-240 	9 mm	24 mm	165 N	06 m/min 09 12 18 24 30 36	10-240 kg 10-220 10-200 10-180 10-110 10- 70 10- 50	EW/DW H/K KI/S20/S50/ S100 cust.-spec. solutions var. access.
	DBS-140 	8 mm	30 mm	103 N	06 m/min 09 12 18 24 30 36	5-150 kg 5-140 5-100 5- 80 5- 50 5- 40 5- 30	EW/DW H/K E cust.-spec. solutions var. access.		DBS-240-R 	9 mm	24 mm	165 N	06 m/min 09 12 18 24 30 36	10-240 kg 10-220 10-200 10-180 10-110 10- 70 10- 50	EW/DW K rostfrei cust.-spec. solutions var. access.
	DBS-150 	15 mm	20 mm	103 N	06 m/min 09 12 18 24 30 36	5-170 kg 5-140 5-100 5- 80 5- 50 5- 40 5- 25	EW/DW H/K KI cust.-spec. solutions var. access.		DBS-255 	9 mm	38 mm	186 N	06 m/min 09 12 18 24 30	1 - 270 kg 1 - 220 1 - 160 1 - 110 1 - 60 1 - 40	EW/DW H/K E S21/S35 cust.-spec. solutions var. access.
	DBS-170 	8 mm	27,5 mm	200 N	06 m/min 09 12 18 24 30 36	5-200 kg 5-160 5-145 5- 90 5- 55 5- 40 5- 30	EW/DW H/K E KI/S19/S50 cust.-spec. solutions var. access.		DBS-300 	11 mm	24 mm	206 N	06 m/min 09 12 18 24 30 36	12-300 kg 12-270 12-250 12-225 12-140 12- 95 12- 70	EW/DW H/K cust.-spec. solutions var. access.

- EW single-acting

DW double-acting

H heat-resistant

K cold-resistant
- E prepared for electronic position sensor

KI tilt stop

KU plastic stop
- KA plastic stop antistatic

V extended stop plate

S prepared for stop position sensing
- S19 steel stop, 19 mm wide

S20 steel stop, 20 mm wide

S21 steel stop, 21 mm wide
- S35 steel stop, 35 mm wide

S50 eel stop, 50 mm wide

S100 eel stop., 100 mm wide

* All specifications given for a coefficient of friction of $\mu = 0.07$

	Basic product	Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants		Basic product	Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants
					at	Weight							at	Weight	
	DBS-410 	15 mm	21 mm	700 N	06 m/min 09 12 18 24 30 36	5-247 kg 5-221 5-195 5-104 5- 65 5- 45 5- 32	EW/DW KI/KU S cust.-spec. solutions var. access.		DBSS06 	8 mm	6 mm	7 N	06 m/min 09 12 18 24 30 36	0.7-10 kg 0.7- 5 0.7- 5 0.7- 4 0.7- 2.5 0.7- 1.5 0.7- 1	EW/DW H/K KI/KU/KA I cust.-spec. solutions var. access.
	DBS-450 	15 mm	35 mm	700 N	06 m/min 09 12 18 24 30 36	5- 450 kg 5- 420 5- 300 5- 240 5- 150 5- 120 5- 90	EW/DW KI/KU S cust.-spec. solutions var. access.		DBSS10 	8 mm	10 mm	14 N	06 m/min 09 12 18 24 30 36	0.7-20 kg 0.7-10 0.7- 8 0.7- 6 0.7- 3.5 0.7- 2.5 0.7- 1.5	EW/DW H/K KI/KU/KA, I clean room ISO cl. 5 cust.-spec. var. access.
	DBS-1150 	15 mm	21 mm	700 N	m/min 09 12 18 24 30	kg 40-1150 ** 40-1150 ** 40- 800 ** 40- 450 ** 40- 300 **	EW/DW KI/KU S cust.-spec. solutions var. access.		DBSSI-20 	8 mm	14 mm	14 N	06 m/min 09 12 18 24 30 36	1-20 kg 1-15 1-12 1-10 1- 6 1- 4 1- 2.5	EW/DW H/K I cust.-spec. solutions var. access.
	DBS-3000 	15 mm	46 mm	2060 N	09 m/min 12 18 24	110-3000 kg 110-3000 110-2350 110-1900	EW/DW cust.-spec. solutions var. access.		DBSST-35 	7 mm	15,2 mm	29 N	06 m/min 09 12 18 24 30 36	1- 42 kg 1- 28 1- 24 1- 18 1- 17 1- 12 1- 7	EW/DW H/K cust.-spec. solutions var. access.

EW single-acting
DW double-acting
H heat-resistant
K cold-resistant

I prepared for inductive position sensor
E prepared for electronic position sensor

KI tilt stop
KU plastic stop
KA plastic stop antistatic

* All specifications given for a coefficient of friction of $\mu = 0.07$
** exceptionally, these values apply at a coefficient of friction of $\mu = 0.02$

Custom-built:

DBS-1100-15-EW-011

With integrated anti-bounce stop designed to keep the pallet in position after the damping operation. A sealed cover that travels simultaneously with the damping unit protects the device against dirt and aggressive liquids. The solution also includes a retracted stop sensor (damping completed but mechanism still locked) and makes it possible to lock the stop in the lower position. Ideally suited for use in harsh environments, e.g. when linking machining centers in the automotive industry.



Electric undamped stoppers

EW single-acting
DW double-acting
H heat-resistant
K cold-resistant



KI tilt stop
KU plastic stop

* All specifications given for a coefficient of friction of $\mu = 0.07$

Custom-built:

ELU-30-07-KI-002 · The unit has a special additional function:
The pallet can run over it in the direction opposite to the actual conveyor direction.
As a result, the stopping point is disabled in the reverse direction.

Electric damped stoppers

		Basic product					Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants		Basic product					Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants		Basic product					Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants		Basic product					Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants		Basic product					Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants		Basic product					Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
		at	Weight	at	Weight	at				Weight	at			Weight	at	Weight	at	Weight				at	Weight			at	Weight	at	Weight	at				Weight	at			Weight	at	Weight	at	Weight				at	Weight			at	Weight	at	Weight	at				Weight	at			Weight	at	Weight	at	Weight				at	Weight			at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at	Weight	at

Pneumatic damped stoppers
for roller systems















Custom-built:

DBSR-400-15-EW-004

The unit possesses an integrated anti-bounce stop designed to keep the pallet in position after the damping operation. It is also pre-assembled with pre-adjusted clamping holders designed for the installation of inductive sensors to determine the stop positions.

	Basic product	Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants
					at	Weight	
	DBSR-30 	8 mm	5,8 mm	21 N	06 m/min 09 12 18	5-30 kg 5-25 5-12 5- 8	EW/DW cust.-spec. solutions var. access.
	DBSR-270 	15 mm	17 mm	185 N	06 m/min 09 12 18 24 30 36	15-270 kg 15-230 15-150 15- 60 15- 30 15- 25 15- 20	EW/DW cust.-spec. solutions var. access.
	DBSR-400 	15 mm 25 mm	22 mm	275 N	06 m/min 09 12 18 24 30 36	15-400 kg 15-360 15-280 15-130 15- 90 15- 60 15- 40	EW/DW cust.-spec. solutions var. access.
	DBSR-550 	15 mm	28 mm	378 N	06 m/min 09 12 18 24 30	18-550 kg 18-470 18-350 18-190 18-120 18- 85	EW cust.-spec. solutions var. access.
	DBSR-1000 	15 mm	21 mm	618 N	09 m/min 12 18 24 30	60-900 kg 60-750 60-550 60-250 60-180	EW/DW cust.-spec. solutions var. access.

EW single-acting
DW double-acting

* All specifications given for a
coefficient of friction of $\mu = 0.07$

	Basic product	Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants		Basic product	Lowering stroke	Damping stroke	max. propelling force*	Scope of application*		Variants
					at	Weight							at	Weight	
	DBSQ-15 	n/a	7 mm	n/a	06 m/min 09 12 18 24 30 36	0.25-15 kg 0.25-10 0.25- 9 0.25- 7 0.25- 6 0.25- 4 0.25- 3	H/K W/G cust.-spec. solutions var. access.		DBSQ-270 	n/a	24 mm	n/a	06 m/min 09 12 18 24 30 36	10-270 kg 10-220 10-200 10-180 10-110 10- 70 10- 50	H/K cust.-spec. solutions var. access.
	DBSQ-20/60 	n/a	21,5 mm	n/a	06 m/min 09 12 18 24 30 36	1-60 kg 1-40 1-35 1-30 1-24 1-18 1-10	H/K W/KU/KA cust.-spec. solutions var. access.		DBSQ-300 	n/a	24 mm	n/a	06 m/min 09 12 18 24 30 36	12-300 kg 12-270 12-250 12-225 12-140 12- 95 12- 70	H/K cust.-spec. solutions var. access.
	DBSQ-170 	n/a	29 mm	n/a	06 m/min 09 12 18 24 30 36	5-220 kg 5-190 5-160 5-150 5- 90 5- 50 5- 40	cust.-spec. solutions var. access.		DBSQ-400 	n/a	23 mm	n/a	06 m/min 09 12 18 24 30 36	7-400 kg 7-280 7-240 7-140 7-100 7- 60 7- 40	H/K kcust.-spec. solutions var. access.
	DBSQ-150-T4 	n/a	24 mm	n/a	06 m/min 09 12 18 24 30 36	5-150 kg 5-100 5-100 5- 90 5- 55 5- 35 5- 25	H/K cust.-spec. solutions var. access.		DBSQ-1100 	n/a	21 mm	n/a	09 m/min 12 18 24 30	40-1100 kg 40-1000 40- 800 40- 450 40- 280	H/K cust.-spec. solutions var. access.

- H

heat-resistant
- K

cold-resistant
- KU

plastic stop
- KA

plastic stop
antistatic
- W

angle stop
- G


straight stop

* All specifications given for a
coefficient of friction of $\mu = 0.07$





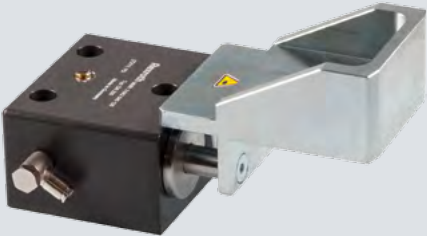

Custom-built:

3842545128

This unit is equipped with a special stop.



Index cylinders

	Basic product	Stroke	Force	Variants
	DI-490 	31 mm	490 N	H cust.-spec. solutions var. access.
	DI-1050 	31,5 mm	1050 N	H cust.-spec. solutions var. access.
	DI-2200-25-001 	25 mm	2200 N	Special variant





Custom-built:

DI-1050-15-007

This unit was designed as a round construction in contrast to our usual index cylinders. It is also equipped with an integrated cover.



Anti-bounce stops

	Basic product	Stroke	Variants
	DR 	8 mm	cust.-spec. solutions var. access.
	DRP 	8 mm	I/E cust.-spec. solutions var. access.

H heat-resistant
I prepared for inductive
position sensor
E prepared for electronic
position sensor

Custom-built:

DRP-001

This unit possesses a different housing geometry: increased height, recesses at the side, and threaded holes at the bottom of the case to permit fastening from below.




Accessories

Product-specific accessories

We offer an extensive range of accessories to accompany our products. For details, please refer to the relevant data sheets.

By way of example, the accessories illustrated here are for the pneumatically driven, damped stopper DBS-20/60:

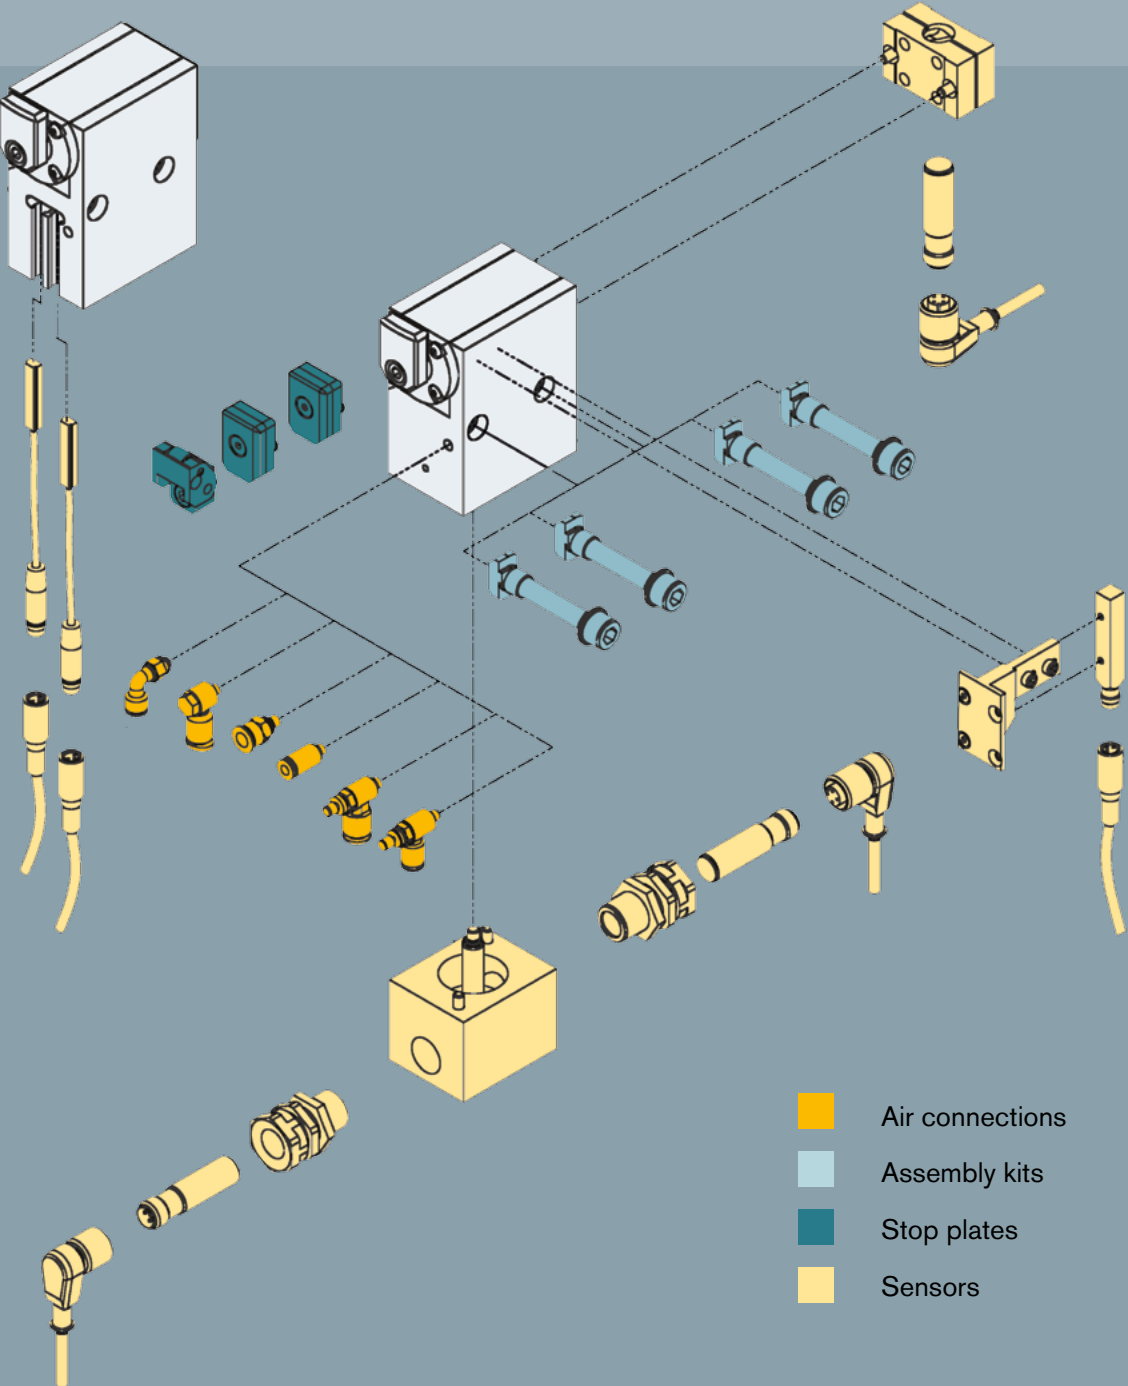

- Air connections
- Assembly kits
- Stop plates
- Sensors

Product-independent accessories

Position sensor for pallet

DP



Basic product

AU / AS
cust.-spec.
solutions

Sensor bracket

DSA



H/K
cust.-spec.
solutions

- H heat-resistant
- K cold-resistant
- AU bottom-mounted sensor
- AS side-mounted sensor

Technical explanations

Basic function: Lowering

Propelling force F_R

The propelling force F_R is the friction force between the conveyor equipment and the pallet. It is a function of the coefficient of friction μ , the weight of the pallet m and acceleration due to gravity g :

$$F_R = \mu \cdot m \cdot g$$

If more than one pallet has been accumulated than the number of pallets n must also be considered:

$$F_R = n \cdot \mu \cdot m \cdot g$$


The coefficient of friction μ is a function of the friction between the conveyor equipment and the pallet.

Examples for the coefficient of friction:

Belt/band: $\mu = 0.2$ to 0.3
Plastic modular belt: $\mu = 0.3$ to 0.5
Accumulation roller chain: $\mu = 0.01$ to 0.03

Example calculation:

$m_{\text{workpiece}} = 5 \text{ kg}$
 $m_{\text{pallet}} = 2 \text{ kg}$
 $\mu = 0.2$
 $g = 9.81 \text{ m/s}^2$
 $F_R = (5 + 2) \text{ kg} \cdot 0.2 \cdot 9.81 \text{ m/s}^2 = \mathbf{13.7 \text{ N}}$

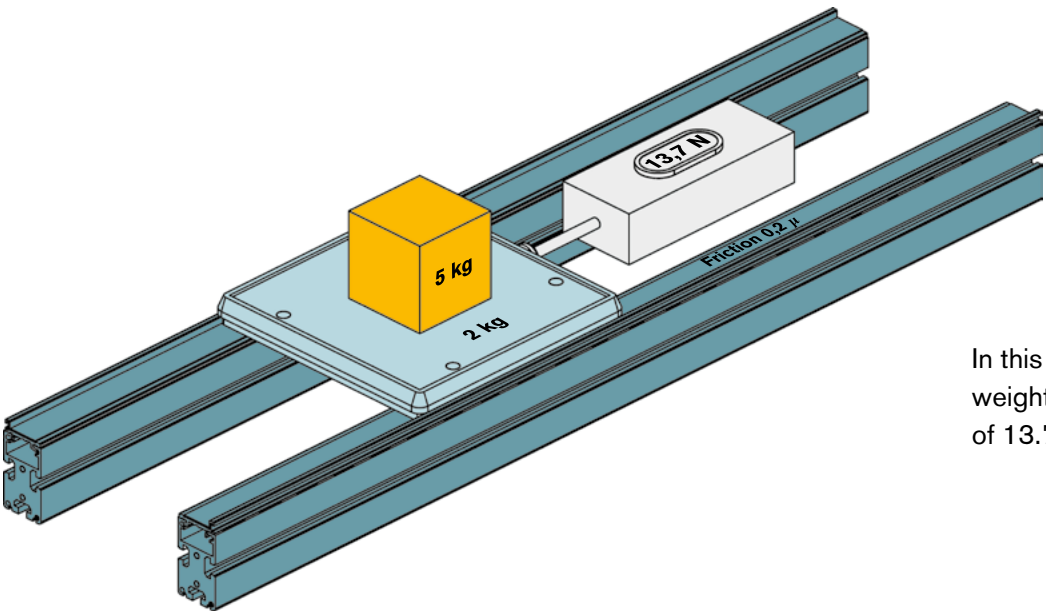

In this example, a pallet of total weight 7 kg exerts a propelling force of 13.7 N on a double belt conveyor.

The product brochure and data sheets indicate the maximum propelling force against which the stopper can reliably lower during long-term operation. The propelling force in your system must be less than the specified value.

Example for DBS-20/60:

(Value given for coefficient of friction $\mu = 0.07$):
Maximum propelling force 41 N

Please note that other pallet weights can be reliably lowered at different coefficients of friction. Using the formula above, you can easily convert the maximum propelling force specified by us for other coefficients of friction.

We would be happy to advise you – just contact us!

Basic function: Stopping


Deceleration force F_v

(by way of example for damped stopper)

The deceleration force F_v is required to slow the pallet down to a halt and dissipate the kinetic energy stored in the pallet. It consists of the damping force (at conveyor speed v and damping stroke s) and the propelling force, which continues to have an effect even during the damping operation:

$$F_v = \frac{m \cdot v^2}{2s} + m \cdot g \cdot \mu$$

The scope of application of the various stoppers is indicated in the product brochure and data sheets. Using these tables, it is easy to determine whether the intended stopper is able to damp the expected pallet weight at your required conveyor speed.

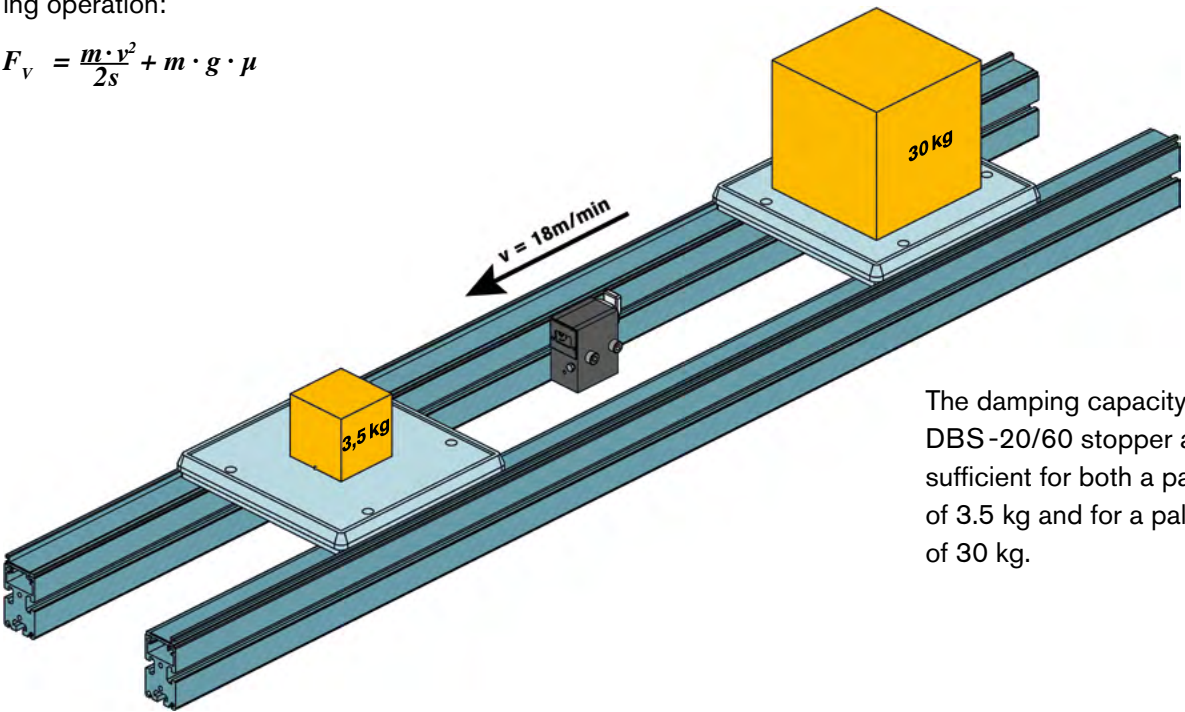

The damping capacity, e.g. of a DBS-20/60 stopper at 18m/min, is sufficient for both a pallet with a weight of 3.5 kg and for a pallet with a weight of 30 kg.

Example for DBS-20/60

(Values given for coefficient of friction $\mu = 0.07$):


Conveyor speed	Pallet weight
6 m/min	3.5 - 60 kg
9 m/min	3.5 - 40 kg
12 m/min	3.5 - 35 kg
18 m/min	3.5 - 30 kg
24 m/min	3.5 - 24 kg
30 m/min	3.5 - 18 kg
36 m/min	3.5 - 10 kg

Please note that other combinations of the conveyor speed and pallet weight parameters are possible, or may indeed be required, at different coefficients of friction. This is true, in particular, when the propelling force accounts for a high proportion of the deceleration force, i.e. in systems with high levels of friction.

You can obtain an initial approximation of these values using the formula above.

We would be happy to advise you – just contact us!

Overview of the Wörner product system

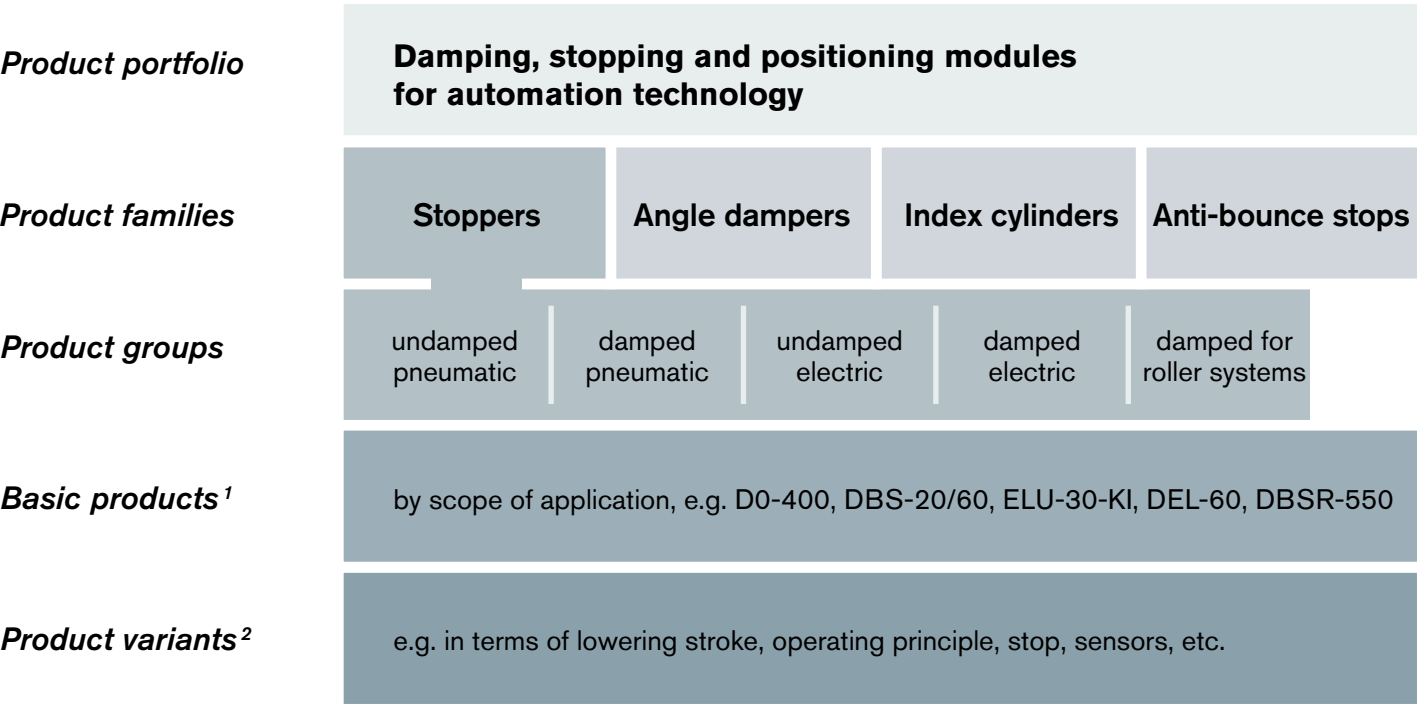

¹ The basic products differ in their scope of application, primarily in terms of the maximum pallet weight that can be stopped.

² The product variants – i.e. the products that can be ordered – are determined by selecting the required technical characteristics, for example in terms of lowering stroke, function, temperature range or stop design.


Order code

You can identify the product variant that is right for your application by consulting the relevant basic product data sheet.

You can choose between the variants defined there, for example on the basis of the lowering stroke, function, temperature range or stop design.

We would be delighted to assist you in choosing your product variant or by developing a custom product tailor-made for your application.

The example opposite illustrates the composition of the order code for a pneumatically driven, damped stopper of type DBS-20/60.

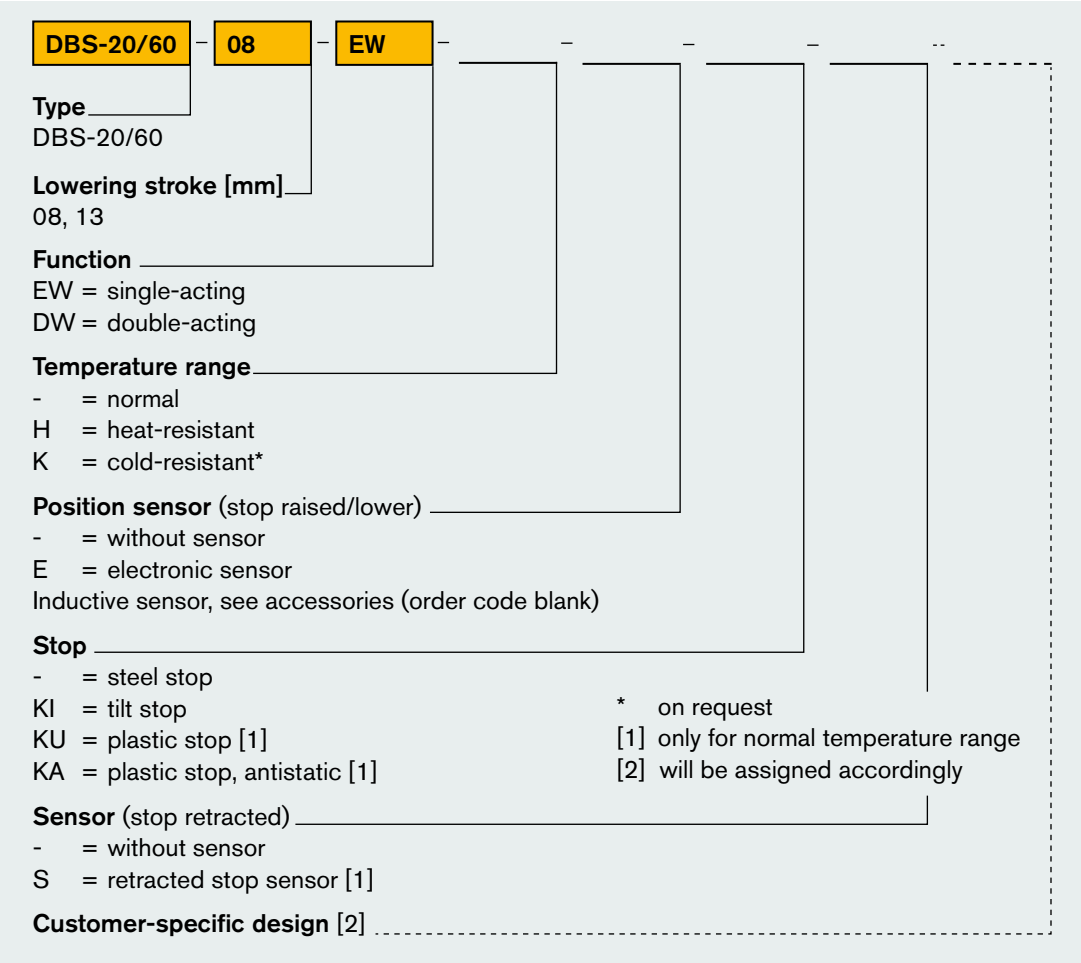

Glossary

Lowering stroke

Distance travelled by the stop to clear and lock (lower or raise) the pallet.

Stop

Component that stops the pallet. Available in a number of designs (plastic stop, steel stop, tilt stop, various dimensions). The combination of pallet and stop materials is an important factor determining the achievable lowering force.

Basic product

Similar basic products form a product group. Basic products differ in their scope of application, usually in terms of the maximum pallet weight they can stop.

Order code

The order code reflects the composition of a product variant and uniquely identifies this. It is possible to order directly from Wörner using this code.

Operating pressure

Working pressure of the pneumatic system. Specifications in data sheets (for the lowering force, for example) usually refer to a operating pressure of 6 bar.

Damping stroke

Distance travelled by the stop when decelerating the pallet. The length of the damping stroke is important for the stopper's damping capacity.

Double-acting

Both the lowering and raising of the stop (into the locking position) are pneumatically or electrically driven movements. Benefits: Closed pneumatic system, higher lowering forces because no spring force has to be overcome.

Angle damper

For stopping with change of direction. Preferred solution for changes of direction during the conveying of shock-sensitive or fragile parts.

Scope of application

Identifies a stopper's damping capacity. Table specifying the maximum pallet weight that can be stopped at different conveyor speeds.

Single-acting

Lowering is a pneumatically or electrically driven movement. By contrast, the stop is raised into the locking position by spring force. Benefits: Easier to control because, for example, only one pneumatic connection is needed. When no compressed air is supplied, the stopper always moves to the locked position (safety feature).

Electronic sensor

Electronic, non-contact sensor system for the detection of certain stop positions.

Conveyor speed

Speed at which the pallet is transported.

Index cylinder

For raising and positioning. Guarantees precise positioning and vertical lifting of the pallet and is ideal for rapid positioning tasks. The workpiece can be processed without vibration.

Inductive sensor

Inductive, non-contact sensor system for the detection of certain stop positions.

Air consumption

A unit's compressed air consumption expressed in litres per work cycle, usually at a working pressure of 6 bar.

Pallet weight

Weight of the pallet and/or the workpiece.

Position sensor

Accessory available for many stopper models. Can be used to determine the position of the stop. For full functionality, further accessories are required (proximity switch, for example).

Product variant

Variant derived from a basic product (for example in terms of lowering stroke, function, temperature range or stop design). The name of the product variant corresponds to the order code that can be used to order the unit from Wörner.

Friction

Force required to set a stationary body in motion or to continue to move a moving body in a constant way. Is a function of the coefficient of friction and weight of the body.

Coefficient of friction

Designates the friction between the conveyor equipment and pallet. Important for the design of the stopping point because both the damping and the lowering capacity depend on the friction.

Anti-bounce stop

For preventing rebound. Holds the pallet loaded with individual parts in position with absolute precision to prevent any rebound. Used in particular in combination with undamped stoppers.

Stopper, undamped

For stopping and clearing pallets. Tough, economical basic design. Suitable for use wherever one or more pallets are to be accumulated at a defined position.

Stopper, damped

For stopping and clearing pallets. For shock-sensitive, fragile parts. Pallets are gently decelerated as they arrive so that workpieces reach their final position without rebound. The forces transferred to the conveyor system are considerably reduced.


Deceleration force

Required to slow the pallet down to a halt and dissipate the kinetic energy stored in the pallet. It consists of the damping force and the propelling force, which continues to have an effect even during the damping operation.

Propelling force

Friction force between the conveyor equipment and pallet. Is a function of the coefficient of friction, pallet weight and acceleration due to gravity.

Wörner worldwide

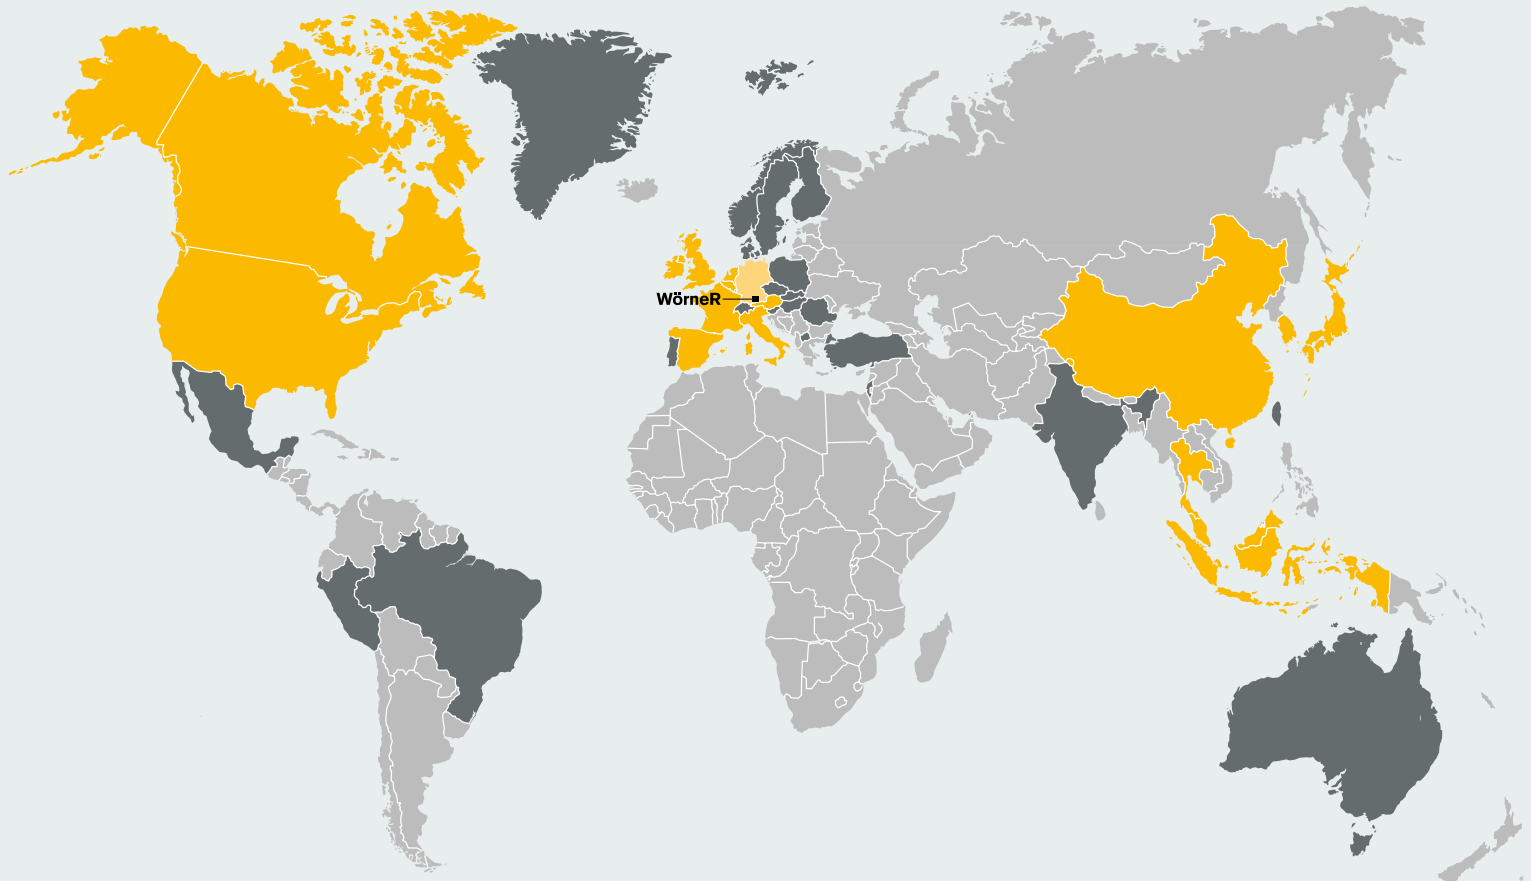

- Countries with regional sales offices or partners
- Countries with well-established customer relationships

Contact details of our international sales partners are available on our website: www.woerner-gmbh.com

Contact us for more

We are committed to exceptional service and support.

If you should have any questions related to products, orders or shipments, or if you should require personal advice, simply contact our headquarter in Denkendorf. We will put you in touch with a representative who understands your needs.

Wörner Automatisierungstechnik GmbH

Rechbergstraße 50
73770 Denkendorf
Germany

Tel. +49 711 601 609-0
Fax +49 711 601 609-10

sales@woerner-gmbh.com
www.woerner-gmbh.com